

TOBACCO CABINET INSTALLATION INSTRUCTIONS

Product packed on Euro pallet | Estimated weight: 300 kg

1. Transportation from warehouse to installation outlet

- The cabinet **MUST** be transported **ONLY** on the Euro pallet and in **VERTICAL** position.
- Do **NOT** transport the cabinets horizontally and **HANDLE WITH CARE** during transportation.

**DO NOT CUT THE BLACK PLASTIC CORDS AND
DO NOT UN-PACK UNTIL THE CABINET IS INSIDE
THE INSTALLATION OUTLET AND IN FINAL POSITION !**




2. Handling the cabinets

- For short distances or inside the store, use a manual pallet truck (hand pallet jack).
- Ensure the path is clear and the floor is flat.
- If there are stairs on the way into the installation location, build a ramp or use an Electric Stair Climbing Hand Truck with a load capacity of over 400 kg.
- Avoid excessive tilting of the cabinet.



3. Un-pack the cabinets

- Once the cabinet is INSIDE the installing outlet and in the final installation position START UN-PACKING
- Now it is OK to cut the black plastic cords. 




The Bottom Skirting Board:
wrapped in plastic and taped
on top of the cabinet



Box inside the cabinet:
Adjustable Feet and Keys



Will be delivered by
the training team



Measuring tool
for optimal feet
adjustment

Jack for cabinet lifting - 2 pieces






4. Installing the Adjustable Feet



- **FIRST** - remove on both sides the metal plates that hold the cabinet fixed to the pallet.




- **SECOND** - Insert the jacks on both sides into the cabinet's metal brackets.

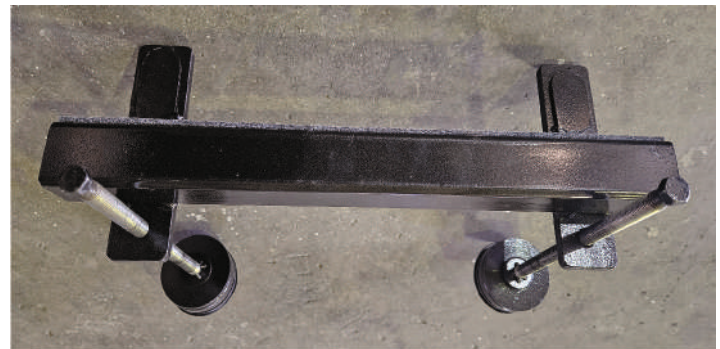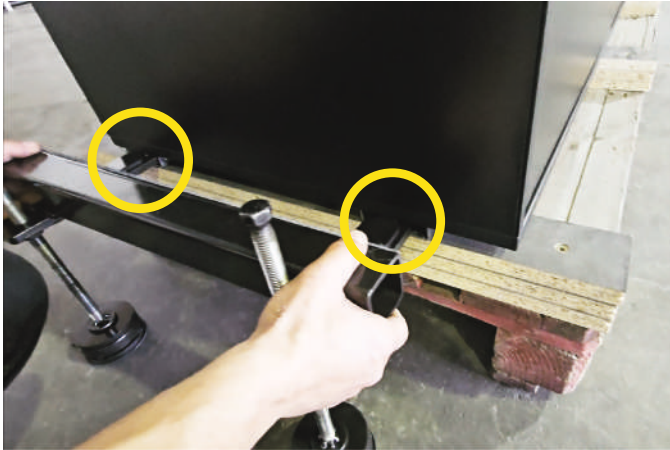

- Use a suitable tubular extension and start lifting the cabinet **CAREFULLY**.
- Screw in a few clicks **SLOWLY** on one side, then **move** to the other side of the cabinet. Repeat the process until the cabinet is lifted off the pallet.
- Do not over tighten a screw or the screws on one side of the cabinet. Avoid **excessive tilting** of the cabinet.
- Once the cabinet is raised, remove the pallet.

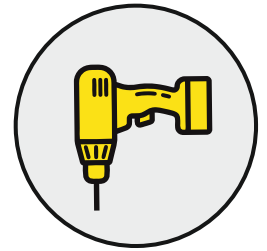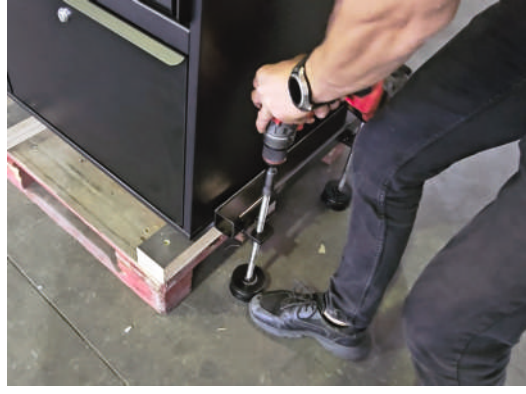

- With the cabinet raised **SCREW IN THE FEET by hand**.
- Use the **measuring tool** for optimal feet adjustment.

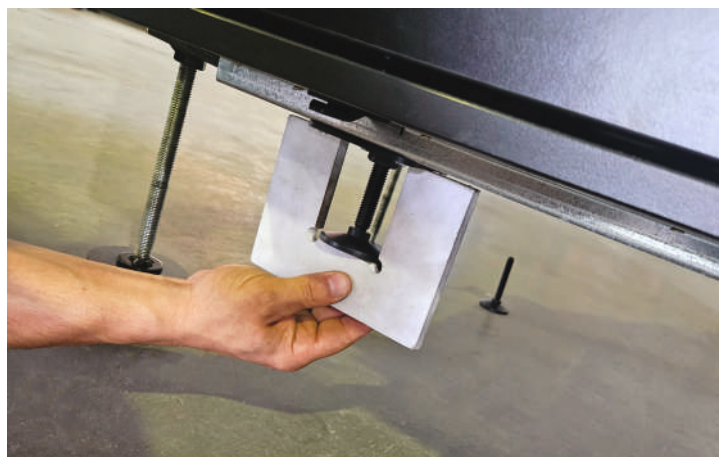

- Once the feet are in place, start lowering **SLOWLY** the cabinet. Same process used for lifting but in reverse.
- Unscrew a few clicks on one side **CAREFULLY**, then **move** to the other side of the cabinet. Repeat the process until the cabinet is lowered on its feet.
- Do not over loosen a screw or the screws on the side of the cabinet. Avoid **excessive tilting** of the cabinet.
- Once the cabinet is on its feet remove the jacks.



Keep the jacks and the measuring tool for further installations.


- If more devices are needed, please contact the manufacturer Step Project for ordering.

5. Placing the Cabinet in the Final Position

- Before placing the cabinet in its final position release the power cord from the back of the cabinet using a wire plier.



- If needed, adjust the feet to ensure perfect alignment and stability.
- **Use a bubble level to check verticality and horizontal leveling. It is ESSENTIAL for the sliding doors self closing mechanism !**

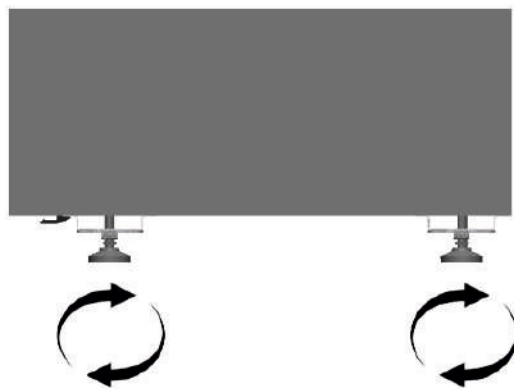

6. Installing the Bottom Skirting Board

- Install the bottom skirting board to conceal the feet.



- Plug the power cord into a 230 V / 50 Hz socket.
- Ensure the socket is functional and properly grounded.

9. Power on

- Inside the cabinet, press the ON/OFF button to activate the lighting system.




10. Light intensity adjustment

- Use the rotary dimmer switch inside the cabinet to adjust the LED brightness as desired.

11. Automatic light function check


- Close the cabinet doors completely:
 - The LED lights should turn off automatically.
- Open one or both doors:
 - The LED lights should turn on automatically.

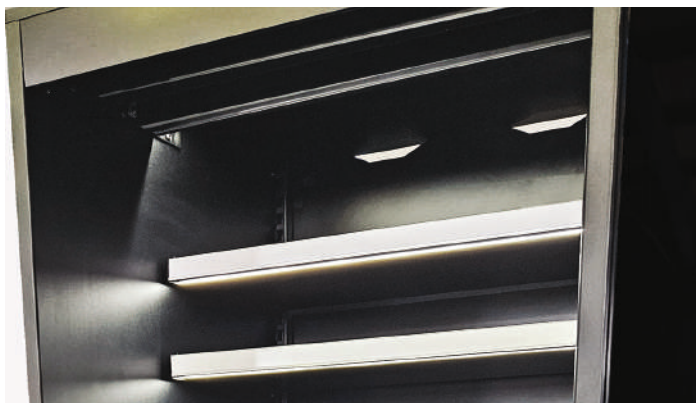

12. REPOSITIONING one of the cabinet`s SHELVES

12.1. Disconnect the Power Track

- Rotate the Power Track connector to the LEFT until it unlocks.
- Gently pull the connector out to disconnect power to the shelf.

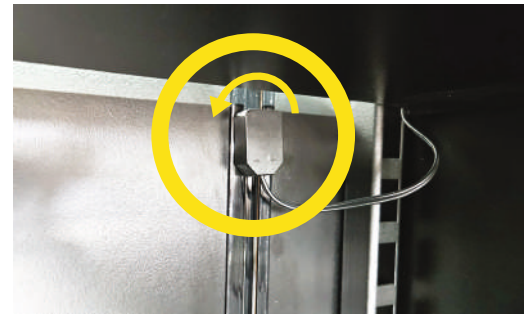

12.2. Reposition the shelf

- Lift the shelf from its hanging system and move it to the desired height.
- Reattach the shelf onto the new bracket position.



12.3. Reconnect the Power Track

- Insert the connector back into the Power Track rail.
- Rotate to the RIGHT until it securely locks into the correct polarity position. The power should be restored.



13. FINAL CHECK

- Perform a final visual and functional check.
- Inform store staff on how to use the dimmer switch and understand the automatic light control behavior.



**PLEASE READ THE MANUAL CAREFULLY.
PRODUCT WARRANTY DEPENDS ON FOLLOWING THE INSTALLATION INSTRUCTIONS.**

